

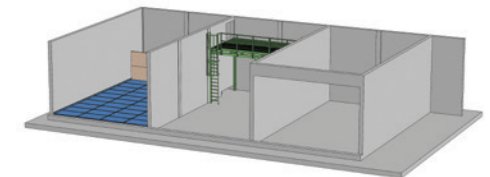
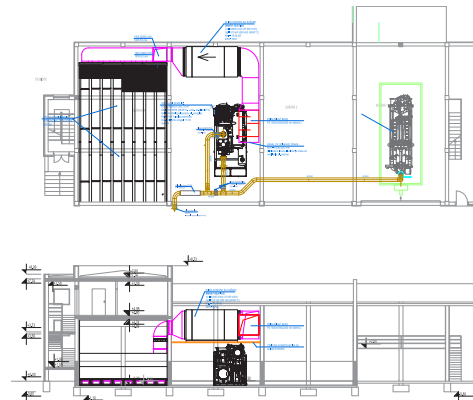
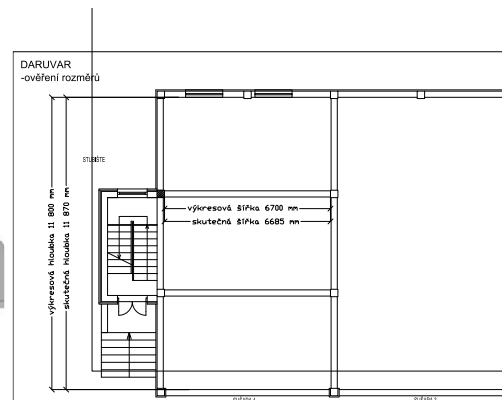
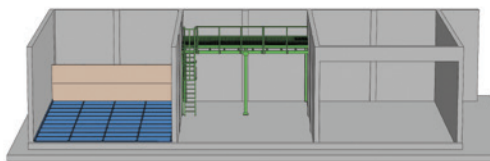
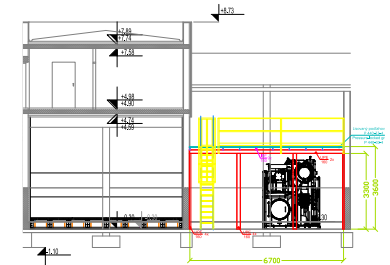
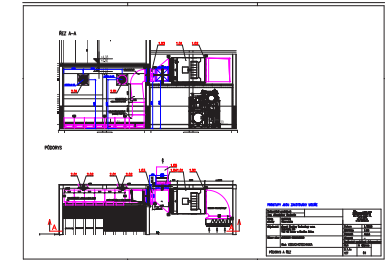
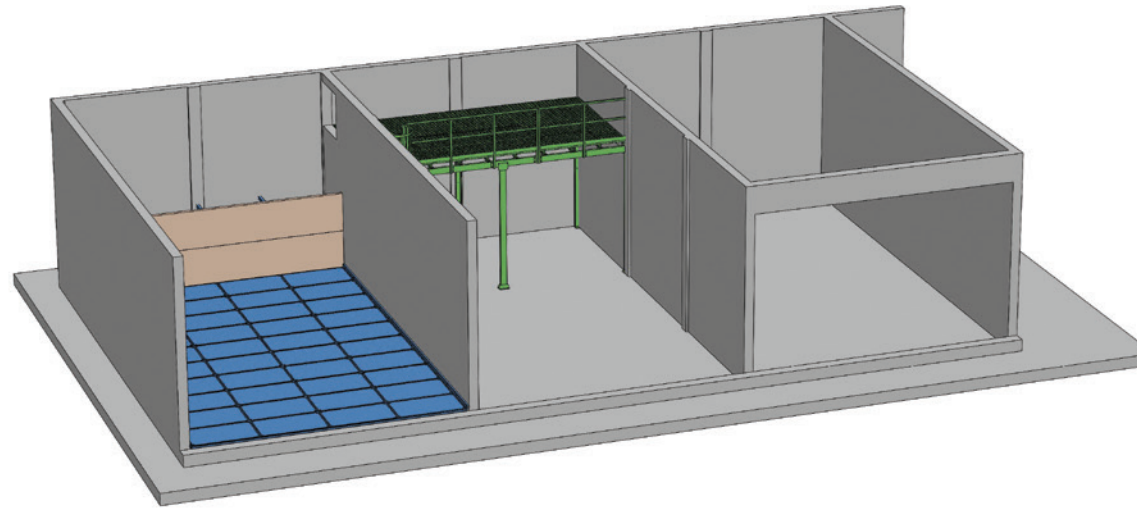


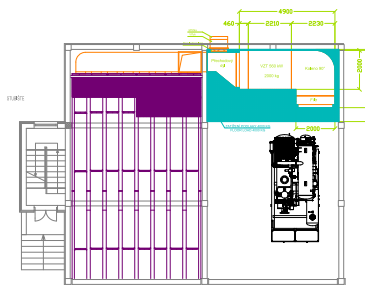









SMART REFERENCE LIST | SMART WOOD CHIPS DRYER 560 KW

SMART HOT-WATER – HOT-AIR AIR HANDLING UNIT 560 KW, AIR FLOW 32 000 M³/H, AIR TEMPERATURE WORKING RANGE 30/81,4°C, WATER FLOW 26,01 M³/H, WATER TEMPERATURE WORKING RANGE 85/65°C, ETHYLENE-GLYCOL MIXTURE 30%, 13 120 MM X 5 995 MM GALVANIZED STEEL STRUCTURE, 10 TONS / M² DYNAMIC WEIGHT CAPACITY, SPECIAL PERFORATED PLATES, CORNER PLATES, WALL PROTECTION BARRIERS, MOISTURE-EXHAUSTING WALL FANS, WITH SILENCERS FOR 35DB, FIRE-PROOF FLAPS, TEMPERATURE SENSORS, MOISTURE SENSORS, REMOTE ICloud MONITORING DARUVAR, CROATIA

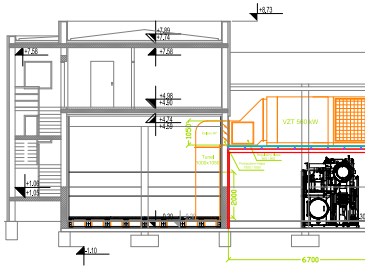

SMART REFERENCE LIST | SMART WOOD CHIPS DRYER 560 KW

SMART HOT-WATER – HOT-AIR AIR HANDLING UNIT 560 KW, AIR FLOW 32 000 M³/H, AIR TEMPERATURE WORKING RANGE 30/81,4°C, WATER FLOW 26,01 M³/H, WATER TEMPERATURE WORKING RANGE 85/65°C, ETHYLENE-GLYCOL MIXTURE 30%, 13 120 MM X 5 995 MM GALVANIZED STEEL STRUCTURE, 10 TONS / M² DYNAMIC WEIGHT CAPACITY, SPECIAL PERFORATED PLATES, CORNER PLATES, WALL PROTECTION BARRIERS, MOISTURE-EXHAUSTING WALL FANS, WITH SILENCERS FOR 35DB, FIRE-PROOF FLAPS, TEMPERATURE SENSORS, MOISTURE SENSORS, REMOTE ICLOUD MONITORING
DARUVAR, CROATIA

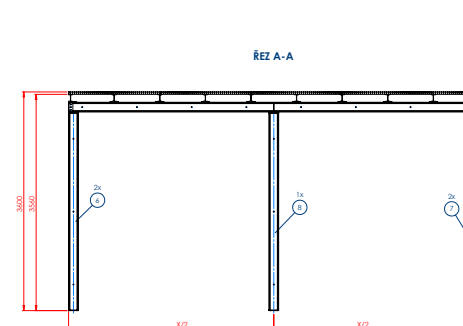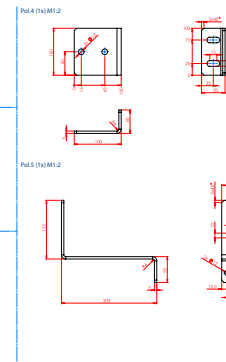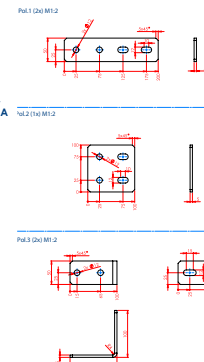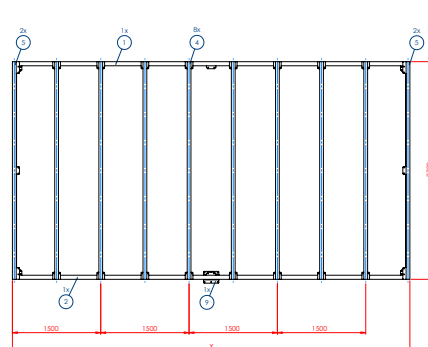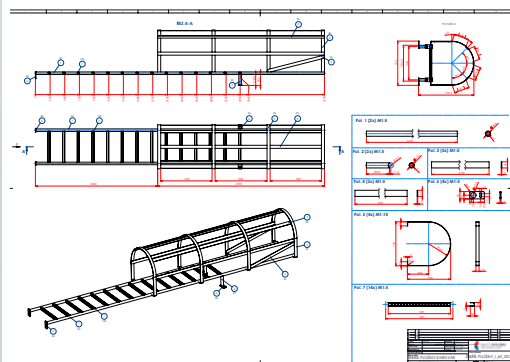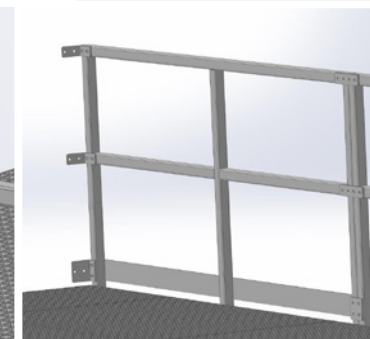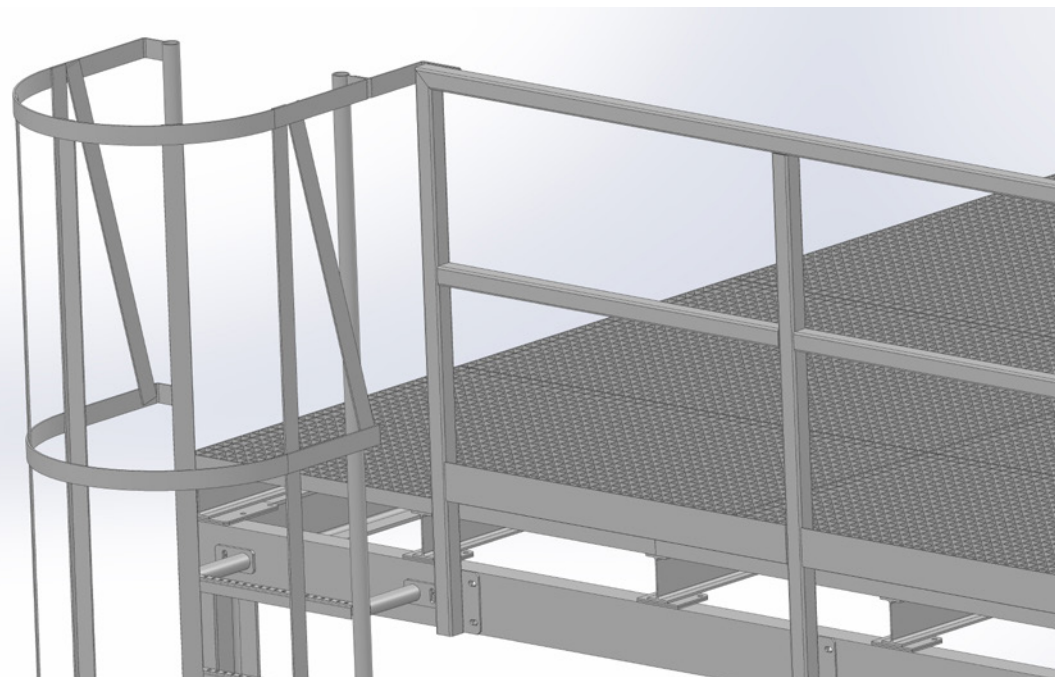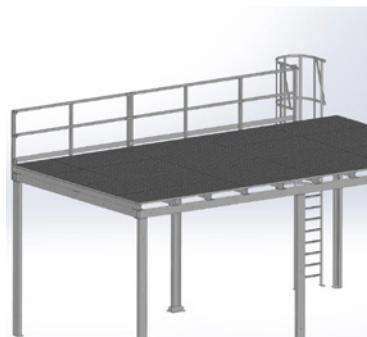










SMART REFERENCE LIST | SMART WOOD CHIPS DRYER 560 KW

SMART HOT-WATER – HOT-AIR AIR HANDLING UNIT 560 KW, AIR FLOW 32 000 M³/H, AIR TEMPERATURE WORKING RANGE 30/81,4°C, WATER FLOW 26,01 M³/H, WATER TEMPERATURE WORKING RANGE 85/65°C, ETHYLENE-GLYCOL MIXTURE 30%, 13 120 MM X 5 995 MM GALVANIZED STEEL STRUCTURE, 10 TONS / M² DYNAMIC WEIGHT CAPACITY, SPECIAL PERFORATED PLATES, CORNER PLATES, WALL PROTECTION BARRIERS, MOISTURE-EXHAUSTING WALL FANS, WITH SILENCERS FOR 35DB, FIRE-PROOF FLAPS, TEMPERATURE SENSORS, MOISTURE SENSORS, REMOTE ICloud MONITORING DARUVAR, CROATIA



SMART REFERENCE LIST | SMART WOOD CHIPS DRYER 560 KW

SMART HOT-WATER – HOT-AIR AIR HANDLING UNIT 560 KW, AIR FLOW 32 000 M³/H, AIR TEMPERATURE WORKING RANGE 30/81,4°C, WATER FLOW 26,01 M³/H, WATER TEMPERATURE WORKING RANGE 85/65°C, ETHYLENE-GLYCOL MIXTURE 30%, 13 120 MM X 5 995 MM GALVANIZED STEEL STRUCTURE, 10 TONS / M² DYNAMIC WEIGHT CAPACITY, SPECIAL PERFORATED PLATES, CORNER PLATES, WALL PROTECTION BARRIERS, MOISTURE-EXHAUSTING WALL FANS, WITH SILENCERS FOR 35DB, FIRE-PROOF FLAPS, TEMPERATURE SENSORS, MOISTURE SENSORS, REMOTE ICloud MONITORING DARUVAR, CROATIA

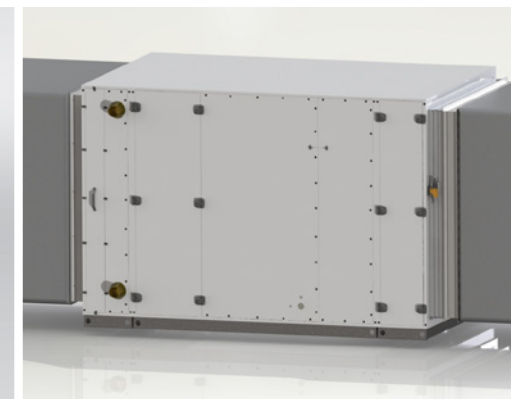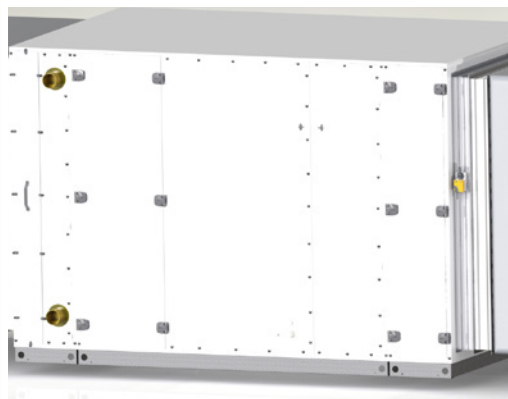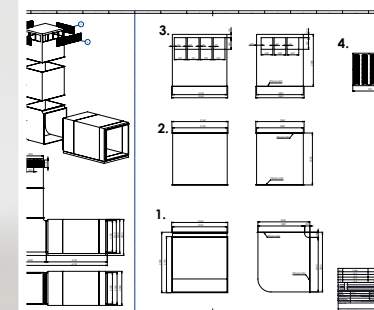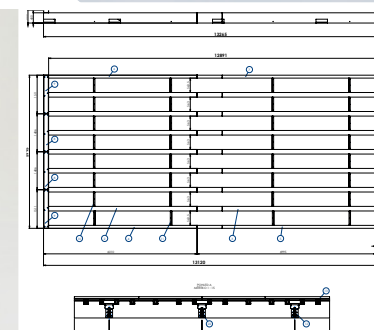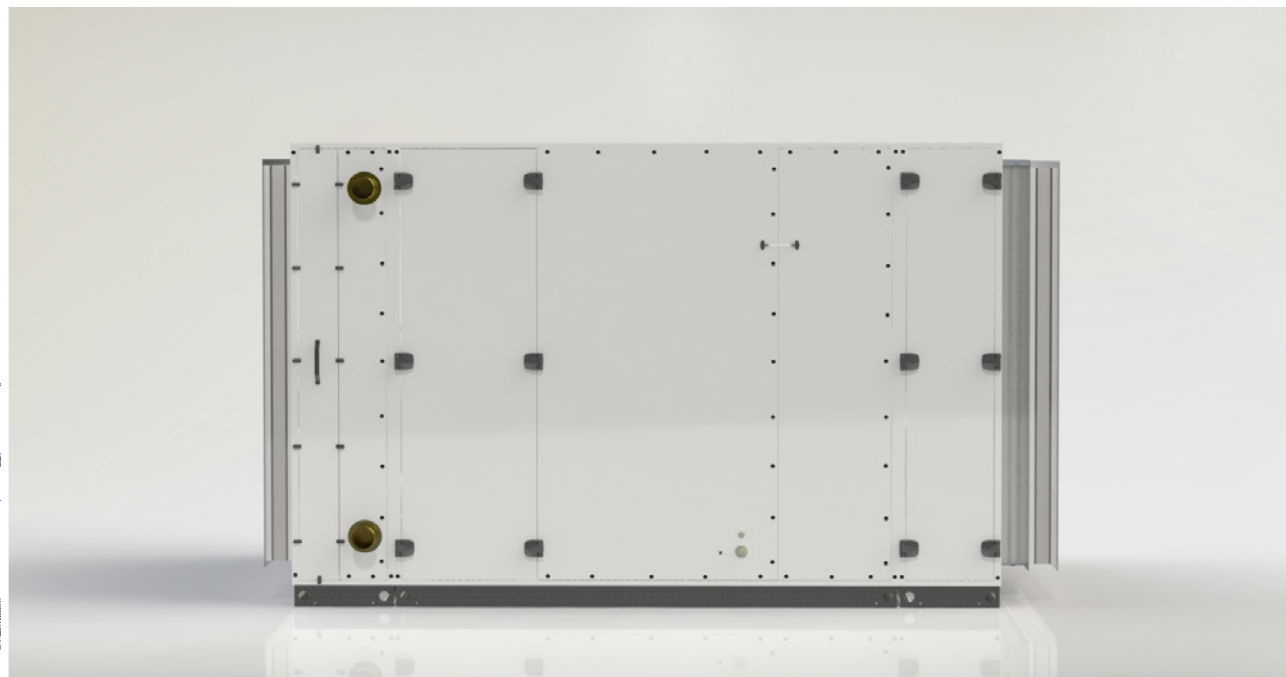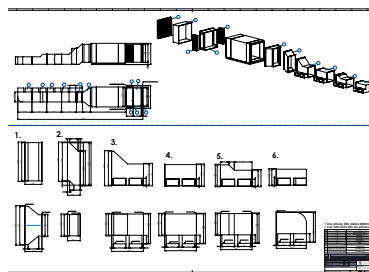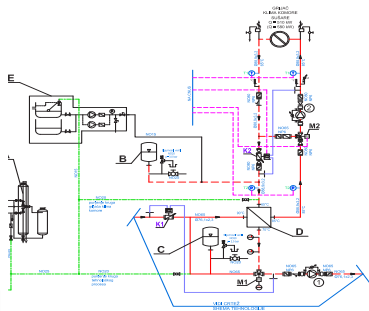



SMART HEATING TECHNOLOGY

SMART HEATING TECHNOLOGY

SMART REFERENCE LIST | SMART WOOD CHIPS DRYER 560 KW

SMART HOT-WATER – HOT-AIR AIR HANDLING UNIT 560 KW, AIR FLOW 32 000 M³/H, AIR TEMPERATURE WORKING RANGE 30/81,4°C, WATER FLOW 26,01 M³/H, WATER TEMPERATURE WORKING RANGE 85/65°C, ETHYLENE-GLYCOL MIXTURE 30%, 13 120 MM X 5 995 MM GALVANIZED STEEL STRUCTURE, 10 TONS / M² DYNAMIC WEIGHT CAPACITY, SPECIAL PERFORATED PLATES, CORNER PLATES, WALL PROTECTION BARRIERS, MOISTURE-EXHAUSTING WALL FANS, WITH SILENCERS FOR 35DB, FIRE-PROOF FLAPS, TEMPERATURE SENSORS, MOISTURE SENSORS, REMOTE ICLOUD MONITORING DARUVAR, CROATIA



SMART REFERENCE LIST | SMART WOOD CHIPS DRYER 560 KW



SMART HOT-WATER – HOT-AIR AIR HANDLING UNIT 560 KW, AIR FLOW 32 000 M³/H, AIR TEMPERATURE WORKING RANGE 30/81,4°C, WATER FLOW 26,01 M³/H, WATER TEMPERATURE WORKING RANGE 85/65°C, ETHYLENE-GLYCOL MIXTURE 30%, 13 120 MM X 5 995 MM GALVANIZED STEEL STRUCTURE, 10 TONS / M² DYNAMIC WEIGHT CAPACITY, SPECIAL PERFORATED PLATES, CORNER PLATES, WALL PROTECTION BARRIERS, MOISTURE-EXHAUSTING WALL FANS, WITH SILENCERS FOR 35DB, FIRE-PROOF FLAPS, TEMPERATURE SENSORS, MOISTURE SENSORS, REMOTE ICLOUD MONITORING DARUVAR, CROATIA





SMART REFERENCE LIST | SMART WOOD CHIPS DRYER 560 KW

SMART HOT-WATER – HOT-AIR AIR HANDLING UNIT 560 KW, AIR FLOW 32 000 M³/H, AIR TEMPERATURE WORKING RANGE 30/81,4°C, WATER FLOW 26,01 M³/H, WATER TEMPERATURE WORKING RANGE 85/65°C, ETHYLENE-GLYCOL MIXTURE 30%, 13 120 MM X 5 995 MM GALVANIZED STEEL STRUCTURE, 10 TONS / M² DYNAMIC WEIGHT CAPACITY, SPECIAL PERFORATED PLATES, CORNER PLATES, WALL PROTECTION BARRIERS, MOISTURE-EXHAUSTING WALL FANS, WITH SILENCERS FOR 35DB, FIRE-PROOF FLAPS, TEMPERATURE SENSORS, MOISTURE SENSORS, REMOTE ICLOUD MONITORING
DARUVAR, CROATIA

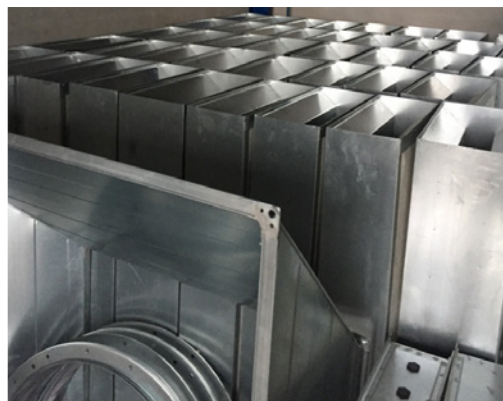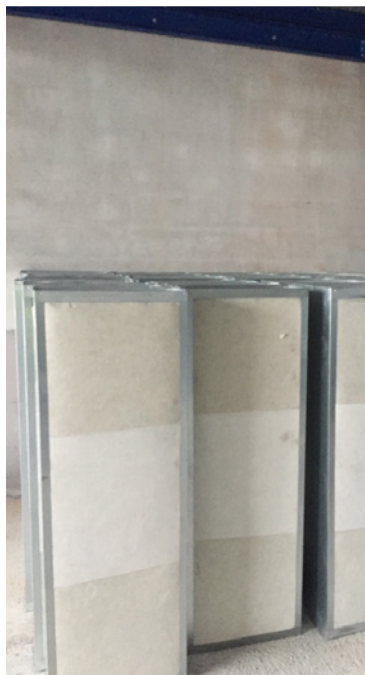



SMART HEATING TECHNOLOGY

SMART HEATING TECHNOLOGY

SMART REFERENCE LIST | SMART WOOD CHIPS DRYER 560 KW

SMART HOT-WATER – HOT-AIR AIR HANDLING UNIT 560 KW, AIR FLOW 32 000 M³/H, AIR TEMPERATURE WORKING RANGE 30/81,4°C, WATER FLOW 26,01 M³/H, WATER TEMPERATURE WORKING RANGE 85/65°C, ETHYLENE-GLYCOL MIXTURE 30%, 13 120 MM X 5 995 MM GALVANIZED STEEL STRUCTURE, 10 TONS / M² DYNAMIC WEIGHT CAPACITY, SPECIAL PERFORATED PLATES, CORNER PLATES, WALL PROTECTION BARRIERS, MOISTURE-EXHAUSTING WALL FANS, WITH SILENCERS FOR 35DB, FIRE-PROOF FLAPS, TEMPERATURE SENSORS, MOISTURE SENSORS, REMOTE ICLOUD MONITORING DARUVAR, CROATIA

