SIEMENS

Product data sheet

3TG1001-0AL2





CONTACTOR SCREW TERMINALS, 3NO+1NC FOR SNAPPING ONTO STANDARD MOUNTING RAIL AC OPERATION AC 230V,45...450HZ

General technical details:

Operating current		
• at AC-3 / at 400 V / rated value	А	8.4
• at AC-1 / at 400 V / rated value	А	20
type of voltage	_	AC
Supply voltage frequency / for auxiliary and control current circuit / rated value	-	
• minimum	Hz	45
• maximum	Hz	450
Control supply voltage	_	
• at 50 Hz / at AC / rated value		
• minimum	V	230
• maximum	V	230
• at 60 Hz / at AC / rated value		
• minimum	V	230
• maximum	V	230
Service power / at AC-3 / at 400 V / rated value	kW	4
Number of poles		4
Number of NC contacts / for main contacts		1
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for main contacts		3

Number of NO contacts / for auxiliary contacts		0				
Item designation / according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		К	К			
Item designation / according to DIN EN 61346-2	_	к	к			
Protection class IP		IP00	IP00			
Ambient temperature						
during operating phase	°C	5525				
Mechanical design:						
Design of the electrical connection						
for main current circuit		screw-ty	screw-type terminals			
for auxiliary and control current circuit		screw-type terminals				
Type of mounting		screw and snap-on mounting onto 35 mm standard mounting rail				
series installation		Yes				
Width	mm	36				
Height	mm	62				
Depth	mm	60				
Certificates/approvals:						
General Product Approval			Test Certificates	other		
CQC SR ROSTEST	(UL)		<u>Manufacturer</u>	Manufacturer		
Further information:						
Information- and Downloadcenter (Catalogs, Brochures,) http://www.siemens.com/industrial-controls/catalogs						
Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/mall						
CAx-Online-Generator						
http://www.siemens.com/cax						

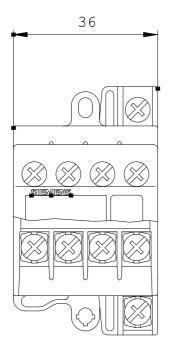

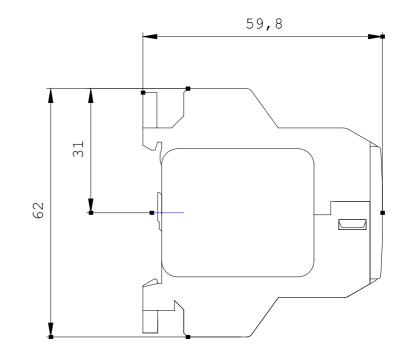

last change:

Jun 13, 2011